

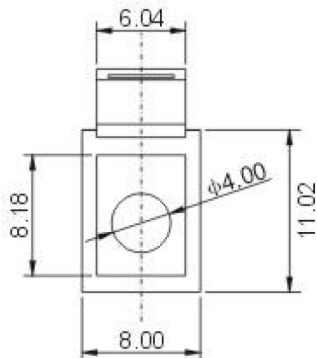




KV224-101

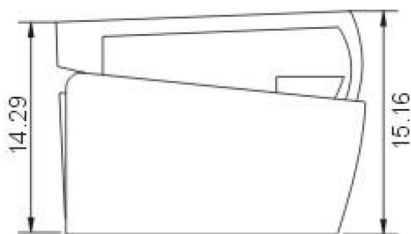

Approval

Electrical

Standard

Rated voltage

Rated current

Wire range

Withstanding voltage



UL

IEC

300V

450V

22A

24A

22-12AWG

0.2-2.5mm²

AC2500V/1Min

Mechanical

Ambient temperature

Strip length

-40℃~+105℃

9-11mm

Dimensions

Pitch

Poles

8.0mm(.315")

1P

Material

Housing

Pin header

Wire guard

PA66,UL94V-0

Copper, Tin plated

Stainless steel

HOW TO ORDER :

	-		P	-		-	
							Customer Request

Series number	No. of pole	Color																						
	<table border="1"> <tr> <td>1</td> <td>Single pitch</td> </tr> <tr> <td>2</td> <td>Double pitch</td> </tr> </table>	1	Single pitch	2	Double pitch	<table border="1"> <tr> <td>1</td> <td>Grey</td> <td>4</td> <td>Green</td> <td>7</td> <td>Trans Parent</td> </tr> <tr> <td>2</td> <td>Blue</td> <td>5</td> <td>Orange</td> <td>8</td> <td>Yellow</td> </tr> <tr> <td>3</td> <td>Black</td> <td>6</td> <td>Red</td> <td>9</td> <td>White</td> </tr> </table>	1	Grey	4	Green	7	Trans Parent	2	Blue	5	Orange	8	Yellow	3	Black	6	Red	9	White
1	Single pitch																							
2	Double pitch																							
1	Grey	4	Green	7	Trans Parent																			
2	Blue	5	Orange	8	Yellow																			
3	Black	6	Red	9	White																			