

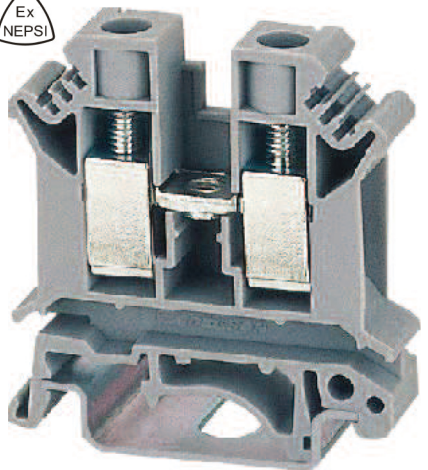




UK10N

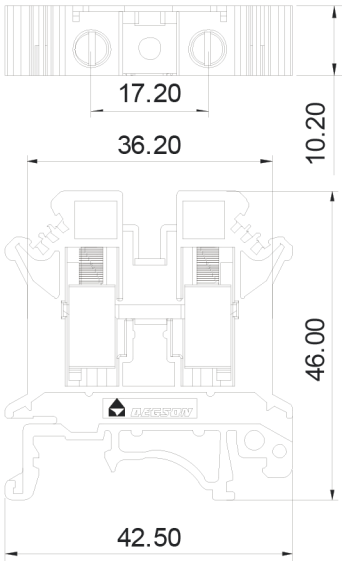

Approval	 	
Capability		
Standard	UL	IEC
Rated Voltage	600V	800V
Rated Current	65A	57A
Wire size	20-6AWG	0.2-10mm ²
T/W/End plate	10.2/42.5/1.6mm	
Height(mm)(NS35:7.5/NS35:15/NS32)	47/54.5/52mm	
Rated surge voltage/Contamination Class	8KV/3	
Stripping length	10mm	
Screw thread/Tightening torque	M4/1.2N.m/10.5Lb-in	
Internal cylindrical gage	B6	
Insulating Material/Inflammability class	PA/V-0	
Specification	Model	Pieces
(1)Terminal block	PC 10	50
(2)End cover	D-PC 2.5	200
(3)Fixed bridge	FBI 2-10	400
2-P	FBI 3-10	150
3-P	FBI 5-10	50
5-P	FBI 10-10	10
10-P		
(4)Step bracket	STL 10N/5N	10
(5)Insertion bridge	EB 2-10	100
2-P	EB 3-10	100
3-P	EB 10-10	10
10-P		
(6)Isolator bridge bar, 10P	ISSBI 10-10	10
(7)Bridge bar isolator	IS-K10	100
(8)Switching bridge		
(9)Separating plate	TS-K	50
(10) Separating plate, width 1.5mm	ATP-PC	50
(11)Test plug socket	DSB 4/7/6	100
(12)Test plug socket insulated	DSBJ 4/15/6	
(13)Zack strip	ZB10	200

HOW TO ORDER :

-

P

-

1

-

X

X

X

Customer Request

Series No.

No. of pole

Color

1 Gray

2 Blue

3 Black

4 Green

5 Orange

6 Red

7 Transp-arent

8 Yellow

9 white