

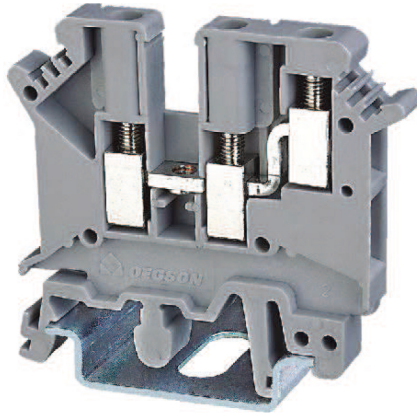



CE



UK4-TW



Approval

Capability

Standard	
Rated Voltage	
Rated Current	
Wire size	
T/W/End plate	
Height(mm)(NS35:7.5/NS35:15/NS32)	
Rated surge voltage/Contamination Class	
Stripping length	
Screw thread/Tightening torque	
Internal cylindrical gage	
Insulating Material/Inflammability class	

UL

300V
30A
24-12AWG

IEC

500V
32A
0.2-4.0mm²

6.2/50.5/2.0mm
47/54.5/52mm

6KV/3
8mm

M3/0.5N.m/4.5Lb-in

A4

PA/V-0

Specification

(1)Terminal block

(2)End cover

(3)Fixed bridge 10P

(4)Insertion bridge 2P

(5)Isolator bridge bar,10P

(6)Bridge bar isolator

(7)Separating plate

(8)Test plug socket

(9)Test plug socket,insulated

(10)Zack Strip

Model

PC 4-TW

D-PC 2.5-TW

FBI 10-6

EB 2-6

EB 3-6

EB 10-6

ISSBI 10-6

IS-K 4

TS-K

DSB 3/10/4

DSBJ 3/13/4

ZB6

Pieces

50

200

10

100

100

50

10

100

50

100


100

250

HOW TO ORDER :

	-	P	-		-	<table border="1"> <tr> <td>X</td> <td>X</td> <td>X</td> </tr> <tr> <td colspan="3">Customer Request</td> </tr> </table>	X	X	X	Customer Request					
X	X	X													
Customer Request															
Series No.		No. of pole		Color											
				<table border="1"> <tr> <td>1 Gray</td> <td>4 Green</td> <td>7 Transp-arent</td> </tr> <tr> <td>2 Blue</td> <td>5 Orange</td> <td>8 Yellow</td> </tr> <tr> <td>3 Black</td> <td>6 Red</td> <td>9 white</td> </tr> </table>	1 Gray	4 Green	7 Transp-arent	2 Blue	5 Orange	8 Yellow	3 Black	6 Red	9 white		
1 Gray	4 Green	7 Transp-arent													
2 Blue	5 Orange	8 Yellow													
3 Black	6 Red	9 white													

mm
(INCH)



THIROANGLE PROJECTION



China · Kang Wei electronics co., LTD

NAME

UK4-TW