


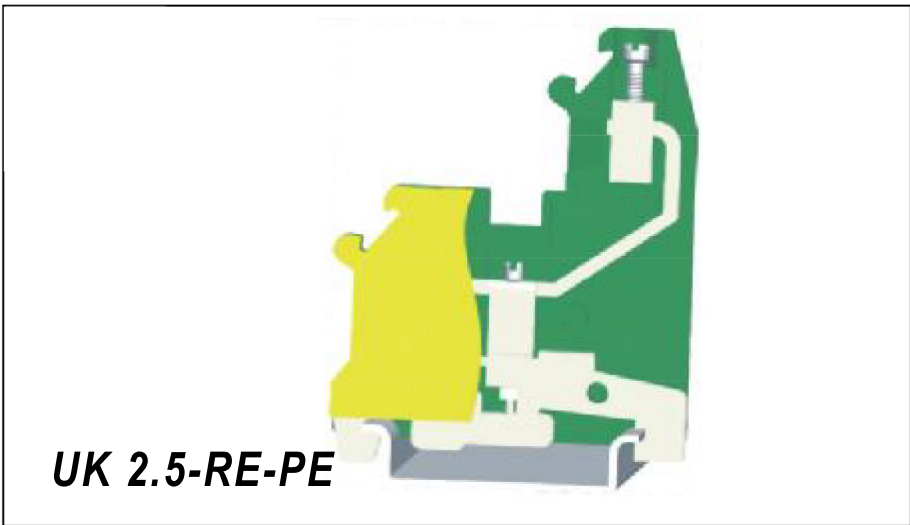

Approval		
Electrical		
Standard	UL	IEC
Rated voltage	—	—
Rated current	—	—
Wire size	24-12AWG	0.2-2.5mm ²
T/W/End plate	5.2/42.5/-mm	
Height(NS35:7.5/NS35:15/NS32)	58.5/66/63.5mm	
Rated surge voltage/Contamination class	6KV/3	
Stripping length	8mm	
Terminal screw: thread/torque	M3/0.5N.m/4.5Lb-in	
Mounting screw: thread/torque	M3/0.5N.m/4.5Lb-in	
Internal cylindrical gage	A3	
Insulating material/Inflammability class	PA/V-0	

HOW TO ORDER :

	-		P	-		-	<table border="1"> <tr> <td>X</td> <td>X</td> <td>X</td> </tr> <tr> <td colspan="3">Customer Request</td> </tr> </table>	X	X	X	Customer Request														
X	X	X																							
Customer Request																									
Series No.		No. of pole			Color		<table border="1"> <tr> <td>1</td> <td>Gray</td> <td>4</td> <td>Green</td> <td>7</td> <td>Transp-arent</td> </tr> <tr> <td>2</td> <td>Blue</td> <td>5</td> <td>Orange</td> <td>8</td> <td>Yellow</td> </tr> <tr> <td>3</td> <td>Black</td> <td>6</td> <td>Red</td> <td>9</td> <td>white</td> </tr> </table>	1	Gray	4	Green	7	Transp-arent	2	Blue	5	Orange	8	Yellow	3	Black	6	Red	9	white
1	Gray	4	Green	7	Transp-arent																				
2	Blue	5	Orange	8	Yellow																				
3	Black	6	Red	9	white																				