

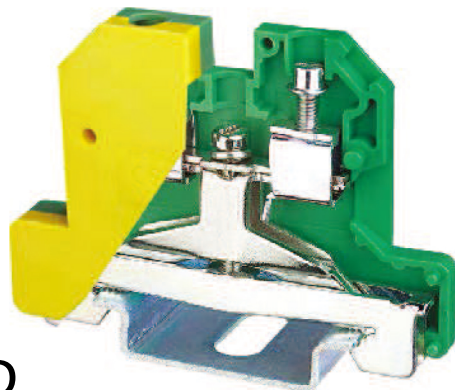




SAK-4JD

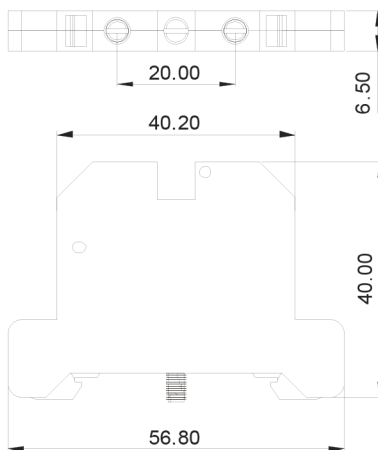

Approval

Electrical

Standard

Voltage

Current

Wire size

T/W/End plate

Height(NS35:7.5/NS35:15/NS32)

Stripping length

Terminal screw: thread/torque

Mounting screw: thread/torque

Insulating material/Inflammability class



UL

IEC

22-10AWG

0.75-4mm²

6.5/56/-mm

44/51.5mm

8mm



M3/0.5N.m/12.5Lb-in

M3/0.5N.m/12.5Lb-in

PAV-0

HOW TO ORDER :

	-	P	-	1	-	<table border="1"> <tr> <td>X</td> <td>X</td> <td>X</td> </tr> <tr> <td colspan="3">Customer Request</td> </tr> </table>	X	X	X	Customer Request														
X	X	X																						
Customer Request																								
Series No.		No. of pole		Color		<table border="1"> <tr> <td>1</td> <td>Gray</td> <td>4</td> <td>Green</td> <td>7</td> <td>Trans- parent</td> </tr> <tr> <td>2</td> <td>Blue</td> <td>5</td> <td>Orange</td> <td>8</td> <td>Yellow</td> </tr> <tr> <td>3</td> <td>Black</td> <td>6</td> <td>Red</td> <td>9</td> <td>white</td> </tr> </table>	1	Gray	4	Green	7	Trans- parent	2	Blue	5	Orange	8	Yellow	3	Black	6	Red	9	white
1	Gray	4	Green	7	Trans- parent																			
2	Blue	5	Orange	8	Yellow																			
3	Black	6	Red	9	white																			



THIROANGLE PROJECTION



China · Kang Wei electronics co., LTD

NAME

SAK-4JD