

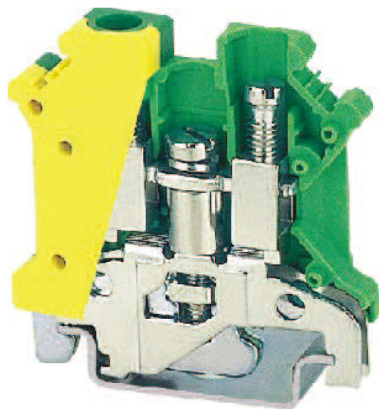




UK6JD

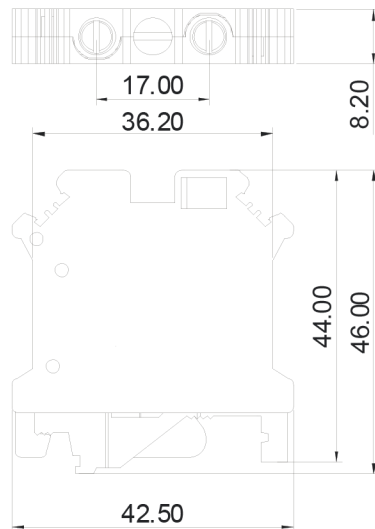

Approval

Capability

Standard	UL	IEC
Rated Voltage	-	-
Rated Current	-	-
Wire size	24-10AWG	0.2-6.0mm ²
T/W/End plate	8.2/42.5/-mm	
Height(mm)(NS35:7.5/NS35:15/NS32)	47/54.5/52mm	
Rated surge voltage/Contamination Class	8KV/3	
Stripping length	8mm	
Terminal screw: thread/torque	M4/1.2N.m/10.5Lb-in	
Mounting screw: thread/torque	M4/1.2N.m/10.5Lb-in	
Internal cylindrical gage	A4	
Insulating Material/Inflammability class	PAV-0	



UL

IEC

24-10AWG

0.2-6.0mm²

8.2/42.5/-mm

47/54.5/52mm

8KV/3

8mm

M4/1.2N.m/10.5Lb-in


M4/1.2N.m/10.5Lb-in

A4

PAV-0

HOW TO ORDER :

	-		P	-		-	<table border="1"> <tr> <td>X</td> <td>X</td> <td>X</td> </tr> <tr> <td colspan="3">Customer Request</td> </tr> </table>	X	X	X	Customer Request					
X	X	X														
Customer Request																
Series No.		No. of pole			Color		<table border="1"> <tr> <td>1 Gray</td> <td>4 Green</td> <td>7 Transp-arent</td> </tr> <tr> <td>2 Blue</td> <td>5 Orange</td> <td>8 Yellow</td> </tr> <tr> <td>3 Black</td> <td>6 Red</td> <td>9 white</td> </tr> </table>	1 Gray	4 Green	7 Transp-arent	2 Blue	5 Orange	8 Yellow	3 Black	6 Red	9 white
1 Gray	4 Green	7 Transp-arent														
2 Blue	5 Orange	8 Yellow														
3 Black	6 Red	9 white														



China · Kang Wei electronics co., LTD

NAME

UK6JD