


CE

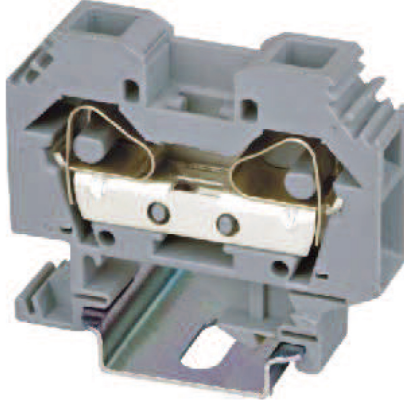

WD2- 16

Approval

Electrical

Standard

Rated voltage

Rated current

Wire size

T/W/End plate

Height(NS35:7.5/NS35:15)

Rated surge voltage/contamination class

Stripping length

Insulating material/Inflammability class

UL

600V

65A

24-6AWG

IEC

800V

76A

0.2-16mm²

12/58/2.5mm


53/60.5mm

8KV/3

18mm

PA/V-0

CE

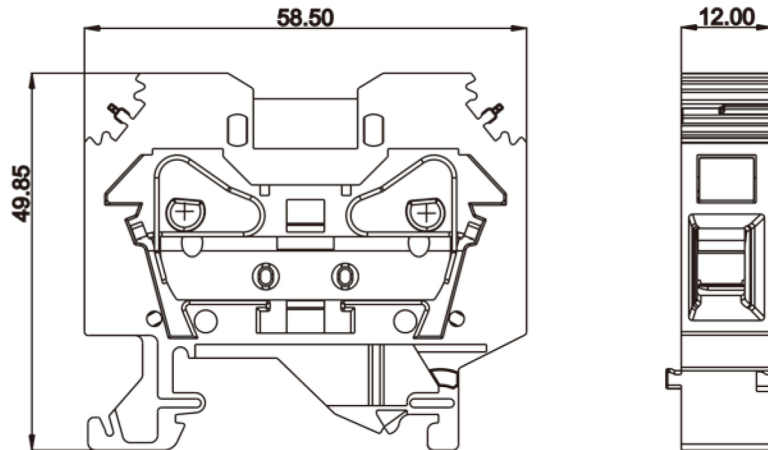

HOW TO ORDER :

- P - 1 - XXX

Series No.


No.of pole

Color

Customer Request

1 Gray	4 Green	7 Transp-arent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 white

mm
(INCH)



THIROANGLE PROJECTION