

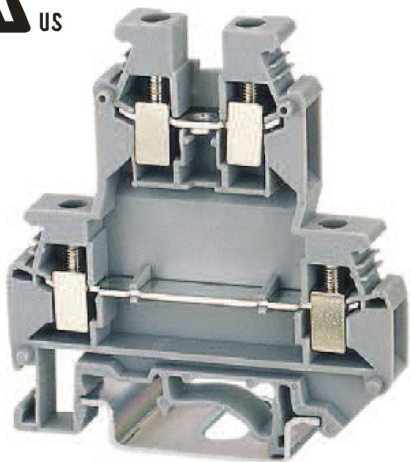
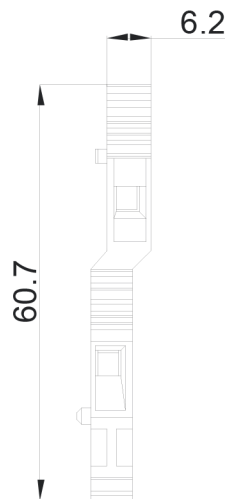


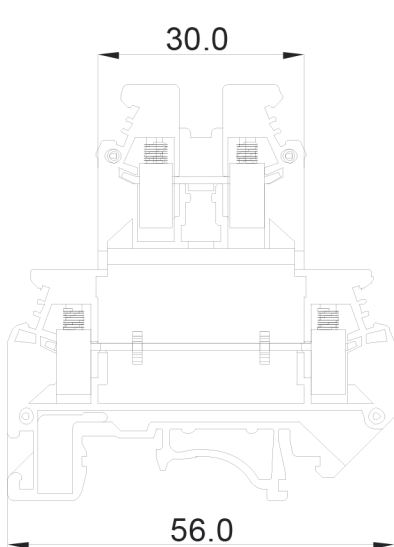

UKK 4



Approval

Electrical

Standard

Rated voltage

Rated current

Wire size

T/W/End plate

Height(NS35:7.5/NS35:15/NS32)

Rated surge voltage/Contamination class

Stripping length

Screw thread/Tightening torque

Internal cylindrical gage

Insulating material/Inflammability class

UL US



UL

300V

30A

10-26AWG

IEC

500V

32A

0.2-4.0mm²

6.2/56/2.6mm

62/69.5/67mm

6KV/3

8mm

M3/0.5N.m/4.5Lb-in

A4

PA/V-0

HOW TO ORDER :

Series No.


No. of pole

Color

Customer Request

1 Gray	4 Green	7 Transp-arent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 white

mm
(INCH)



THIROANGLE PROJECTION



China · Kang Wei electronics co., LTD

NAME

UKK 4