


康伟栅栏式PCB接线端子

产品规格书





KV55C-B

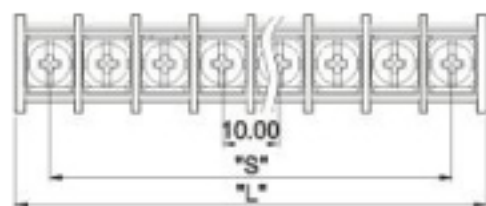

$$S = 10.00 \times (P - 1)$$

$$L = 10.00 \times (P - 1) + 12.50$$

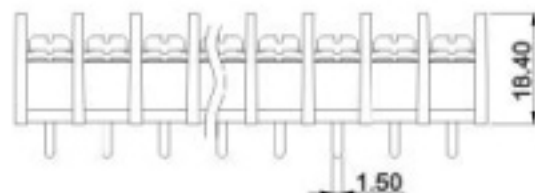

极数	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	22.50	32.50	42.50	52.50	62.50	72.50	82.50	92.50	102.50	112.50	122.50	132.50	142.50	152.50
S(mm)	10.00	20.00	30.00	40.00	50.00	60.00	70.00	80.00	90.00	100.00	110.00	120.00	130.00	140.00
极数	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	162.50	172.50	182.50	192.50	202.50	212.50	222.50	232.50	242.50	252.50	262.50			
S(mm)	150.00	160.00	170.00	180.00	190.00	200.00	210.00	220.00	230.00	240.00	250.00			

认证

电气性能

参考标准

额定电压

额定电流

导线线径

耐电压

绝缘阻抗

机械性能

最大锁紧扭力

环境温度

尺寸

间距

极数

材质及电镀

塑件

端子

螺丝



UL

IEC

300V

750V

20A

32A

22-12AWG

4.0mm²

AC2000V/1Min

500MΩ/DC500V

1.2Nm/10.6Lb.in

-40℃~+105℃

10.0mm(.394")

2P-26P

PA66,UL94V-0

黄铜,0.8厚 镀锡

钢,M4镀锌

订购方式:

□ □ □ — □ □ P — 1 □ —



X	X	X
客	户	需
求		

C:	S:	A: 有固定孔
H:	R:	B: 无固定孔

极数

颜色

1 灰色	4 绿色
3 黑色	



中国·康伟电子有限公司

NAME

KV55C-B