


康伟栅栏式PCB接线端子


产品规格书



| | | |
|--------|----------|---------------------|
| 认证 | UL | CE |
| 电气性能 | | |
| 参考标准 | UL | IEC |
| 额定电压 | 300V | 250V |
| 额定电流 | 15A | 24A |
| 导线线径 | 22-14AWG | 2.5mm ² |
| 耐电压 | | AC2000V/1Min |
| 绝缘阻抗 | | 500MΩ/DC500V |
| 机械性能 | | |
| 最大锁紧扭力 | | 0.5N.m 4.4Lb.in |
| 环境温度 | | -40℃~+105℃ |
| 尺寸 | | |
| 间距 | | 7.62mm(.300") |
| 极数 | | 2P-24P |
| 材质及电镀 | | |
| 塑件 | | PA66+23%GF LUL94V-0 |
| 端子 | | 黄铜, 0.8厚 镀锡 |
| 螺丝 | | 铜, M3镀锡 |

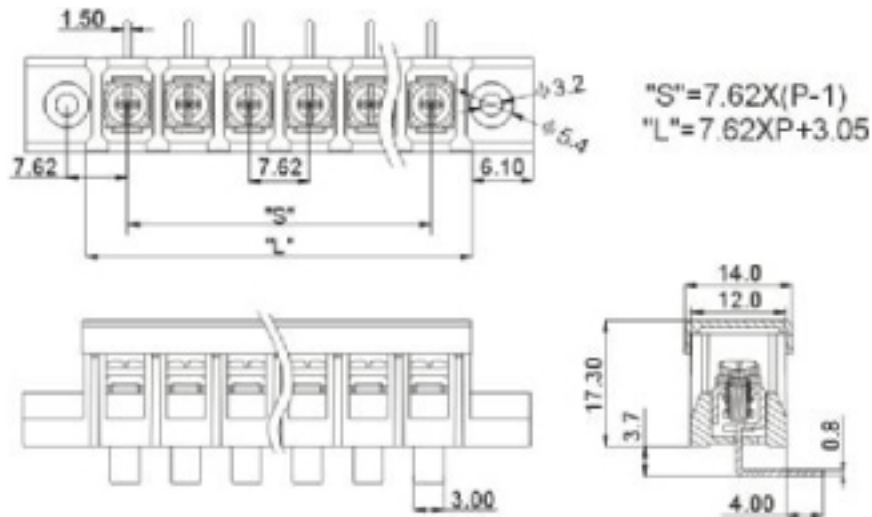

订购方式:

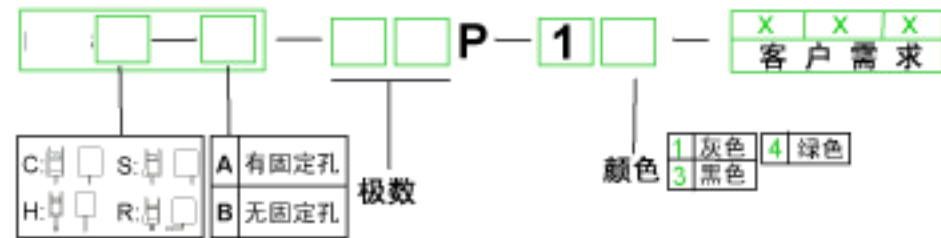

| | | | | | | | | | | | | | | |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|--------|--------|--------|
| 极数 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 |
| L(mm) | 18.29 | 25.91 | 33.53 | 41.15 | 48.77 | 56.39 | 64.01 | 71.63 | 79.25 | 86.87 | 94.49 | 102.11 | 109.73 | 117.35 |
| S(mm) | 7.62 | 15.24 | 22.86 | 30.48 | 38.10 | 45.72 | 53.34 | 60.96 | 68.58 | 76.20 | 83.82 | 91.44 | 99.06 | 106.68 |
| 极数 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | |
| L(mm) | 24.97 | 32.59 | 40.21 | 47.83 | 55.45 | 63.07 | 70.69 | 78.31 | 85.93 | 93.55 | 101.17 | | | |
| S(mm) | 14.30 | 21.92 | 29.54 | 37.16 | 44.78 | 52.40 | 60.02 | 67.64 | 75.26 | 82.88 | 90.50 | | | |

| | |
|--|----------------------|
| | 中国·康伟电子有限公司 |
| | NAME KV25GR-A |